





 **3 years Warranty!**

-   
 Biometrics
-   
 RFID
-   
 Barcode
-   
 QR Code

## Qualica-RD **6003-A/B/C**

Half height security door. Manual or automatic type.







**Qualica-RD 6003-A/B/C.** Our security doors are designed to work together with our turnstiles or tripods. It supports three types: manual type opened by lock, manual type with electronic lock, automatic type with motor drive.

The body is made of durable and anti-rust stainless steel. The blade is made of high quality glass. IP65 waterproof level, indoor/outdoor use. Fire safety requirements, the security door open automatically.

**3 years warranty.** Easy to install and maintain. Includes bracket to integrate with any type of third party access control system.




## Technical specifications


<p><b>Security Door</b> <b>QRD-6003</b></p>			
Model	A	B	C
Opening mode	Manual type	Manual type	Automatic type
Opening direction	Unidirectional	Unidirectional	Bidirectional
Electric lock	✗	✓	Motor con embrague
Access control	✗	Supports any access control	Supports any access control
Power supply	✗	AC220V/110V, 50/60Hz	AC220V/110V, 50/60Hz
LED light	✗	✗	✓
Self-closing	✗	✗	✓
Details	 <p>KEY CYLINDER</p>	 <p>MAGNETIC LOCK</p>	 <p>MOTOR</p>
Material	304 stainless steel + plexiglass	304 stainless steel + plexiglass	304 stainless steel + plexiglass
Dimensions	1098 * 1000mm	1200 * 170 * 1000mm	1390 * 120 * 1245mm
Net Weight	25kg /unit	30kg /unit	35kg /unit
Clearance Width	900mm	900mm	900mm
MCBF	10 million steps	10 million steps	10 million steps
Voltage / Consumption	✗	24V DC / 40W	24V DC / 40W
Communication	✗	Dry contact, relay signal	Dry contact, relay signal, RS485
Operating Temperature	-25 °C to 70 °C	-15 °C to 60 °C	-15 °C to 60 °C
Operating Humidity	0 ~ 95% (Non-condensing)	0 ~ 95% (Non-condensing)	0 ~ 95% (Non-condensing)
Working Environment	Indoor / Outdoor	Indoor / Outdoor	Indoor / Outdoor
Flow rate	30 persons per minute	30 persons per minute	30 persons per minute



**QRD-6003A**  
Dimensions (mm)

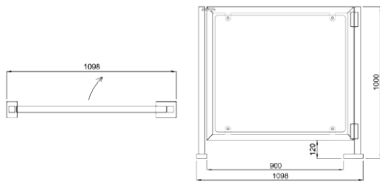

**QRD-6003B**  
Dimensions (mm)

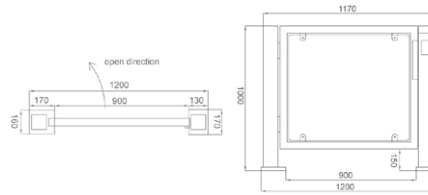

**QRD-6003C**  
Dimensions (mm)

